

REXLiTE[®]

2021
ISSUE



M8L
REXMode



REX^{Li}TE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : Ø89 × H60 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 890 Lm

Power Consumption : 8 W

Note : Open Ø80 × H65 mm



M8M
REXMode



REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : Ø89 × H75 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 890 Lm

Power Consumption : 8 W

Note : Open Ø80 × H80 mm



M8S
REXMode



REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : Ø75 × H75 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3


Luminous Flux : 890 Lm

Power Consumption : 8 W

Note : Open Ø65 × H80 mm



M8-N1 / N2 / N3
REXMode

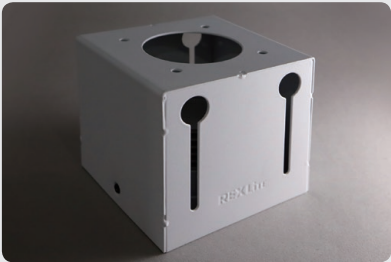

REX^{Li}TE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : L 97 × W96 × H90 mm

L190 × W96 × H90 mm

L285 × W96 × H90 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 890 / 1,780 / 2,670 Lm

Power Consumption : 8 / 16 / 24 W

Bore Dimension : L 97 × W96 × H95 mm

L192 × W97 × H95 mm

L287 × W97 × H95 mm

Note : Low Glare

Two Axis Rotary



REXCypher Series

06



C5
REXCypher



REXITE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / White

Beam Angle : Flood

Dimension : Ø150 x H39 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3

Luminous Flux : 1,520 Lm

Power Consumption : 14 W


Note : Open Ø135 x H40 mm

REXCypher Series

07



C1
REXCypher

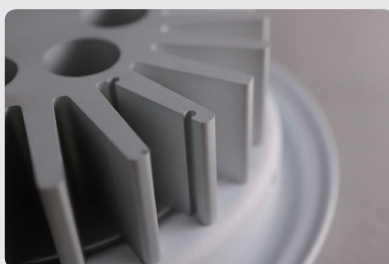

REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : Black / White / Aluminum

Beam Angle : Flood

Dimension : Ø111 × H37 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 820 Lm

Power Consumption : 8.5 W

Note : Open Ø100 × H45 mm



A1
REXArtem

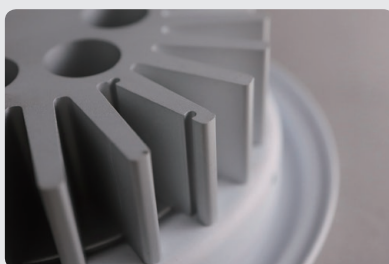

REX^LITE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / White / Aluminum

Beam Angle : AR111 Spotlight, 25°

Dimension : Ø111 × H34 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3


Luminous Flux : 700 Lm

Power Consumption : 8.5 W

Note : Open Ø100 × H40 mm



M5
REXMode

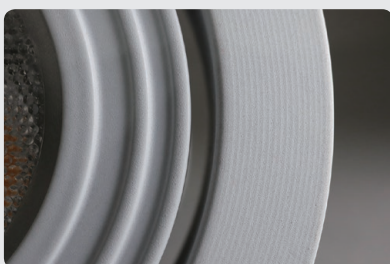

REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : Black / White / Aluminum

Beam Angle : 25°, Spotlight

Dimension : Ø80 × H45 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3

Luminous Flux : 475 Lm

Power Consumption : 6 W

Note : Open Ø70 × H50 mm

REXMini Series

10



M2
REXMini



REX^{Li}TE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / Aluminum

Beam Angle : Spotlight, 25°

Dimension : Ø49 × H30 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 100 Lm

Power Consumption : 2 W

Note : Open Ø45 × H35 mm




QA1-N1 / N2 / N3
QubicArtem

REX[®]LITE
瑞司照明系統



Origin : Taiwan	Luminous Flux : 700 / 1,400 / 2,100 Lm
Color : Black / White	Power Consumption : 8.5 / 17 / 25.5 W
Beam Angle : Spotlight, 25°	Bore Dimension : L152 × W152 × H115 mm
Dimension : L150 × W150 × H100 mm	L302 × W152 × H115 mm
L300 × W150 × H100 mm	L452 × W152 × H115 mm
L450 × W150 × H100 mm	Note : 152 152
LED Source : NICHIA LED	
LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50	
Color Tolerance Adjustment : SDCM ≤ 3	

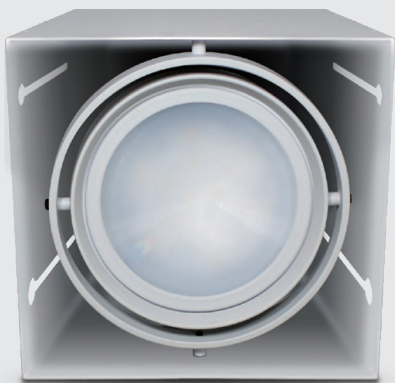

QC1-N1 / N2 / N3
QubicCypher

REX[®]LiTE
瑞司照明系統




Origin : Taiwan	Luminous Flux : 820 / 1,640 / 2,460 Lm
Color : Black / White	Power Consumption : 8.5 / 17 / 25.5 W
Beam Angle : Flood	Bore Dimension : L152 x W152 x H105 mm
Dimension : L150 x W150 x H100 mm	L302 x W152 x H105 mm
L300 x W150 x H100 mm	L452 x W152 x H115 mm
L450 x W150 x H100 mm	Note : 152 152
LED Source : NICHIA LED	
LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50	
Color Tolerance Adjustment : SDCM ≤ 3	

QubicCypher Series

13



QC8
QubicCypher

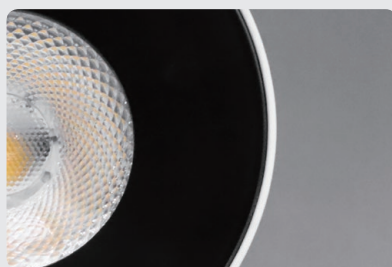

REX[®]LITE
瑞司照明系統

Origin : China

Color : Black / White

Beam Angle : Downlight, 24°

Dimension : Ø100 × H100 mm

LED Specs : Ra ≥ 90 LM80 2,700K-5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 890 Lm

Power Consumption : 8 W

Note :

QubicCypher Series

14



QC13
QubicCypher

REX[®]LITE
瑞司照明系統



Origin : China

Color : Black / White

Beam Angle : Downlight, 24°

Dimension : Ø134 × H123 mm

LED Specs : Ra ≥ 90 LM80 2,700K-5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 1,200 Lm

Power Consumption : 13 W

Note :



M8-T
REXMode

REX^{Li}TE[®]
瑞司照明系統



Origin : Taiwan

Color : Black / White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : Ø60 × W252 × H214 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 890 Lm

Power Consumption : 8 W

Note : 2 / 4 / 6 wires tracking system



M8-TS
REXMode



REX^{Li}TE[®]
瑞司照明系統

Origin : Taiwan

Color : Black / White

Beam Angle : Spotlight, 10° / 24° / 38°

Dimension : Ø60 x W187 x H214 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 890 Lm

Power Consumption : 8 W

Note : 2 / 4 / 6 wires tracking system

REXNephia Series

17

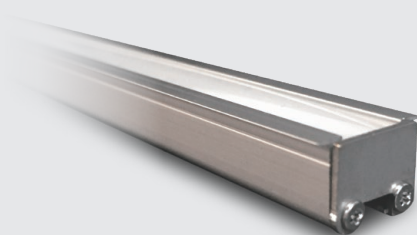

RN105 / RN110 / RN115 / RN120
REXNephia



REX[®]LiTE
瑞司照明系統

Origin : Taiwan

Color : Black / Aluminum

Beam Angle : Linear Light, Flood, Embedded

Dimension : L 507 x W15 x H10 mm

L1,007 x W15 x H10 mm

L1,507 x W15 x H10 mm

L2,007 x W15 x H10 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 400 / 800 / 1,200 / 1,600 Lm

Power Consumption : 3.5 / 7 / 10.5 / 14 W


Note : Open L x W11.8 x H>18 mm

REXNephia Series

18

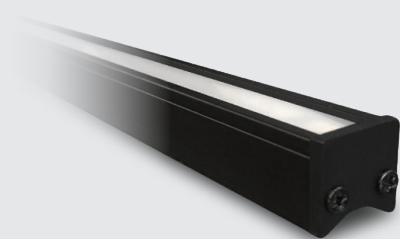

RN205 / RN210 / RN215 / RN220
REXNephia

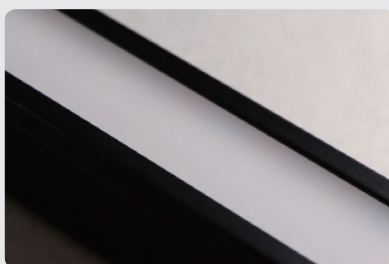

REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : Black / Aluminum

Beam Angle : Linear Light, Flood, Embedded / Suspension

Dimension : L 509 x W13.5 x H14 mm

L1,009 x W13.5 x H14 mm

L1,509 x W13.5 x H14 mm

L2,009 x W13.5 x H14 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color TolCerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 400 / 800 / 1,200 / 1,600 Lm

Power Consumption : 3.5 / 7 / 10.5 / 14 W


Note : Open L x W13.5 x H>23 mm

REXNephia Series

19

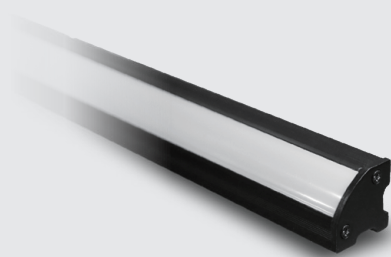

RN305 / RN310 / RN315 / RN320
REXNephia

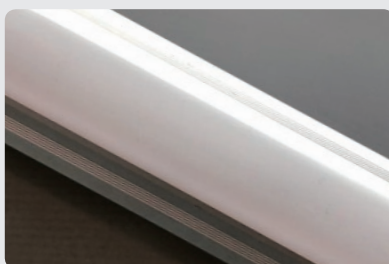

REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : Black / Aluminum

Beam Angle : Linear Light, Flood

Dimension : L 509 × W20.2 × H20.2 mm

L1,009 × W20.2 × H20.2 mm

L1,509 × W20.2 × H20.2 mm

L2,009 × W20.2 × H20.2 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color TolCerance Adjustment : SDCM ≤ 3


Luminous Flux : 400 / 800 / 1,200 / 1,600 Lm

Power Consumption : 3.5 / 7 / 10.5 / 14 W

Note :

REXNephia Series

20

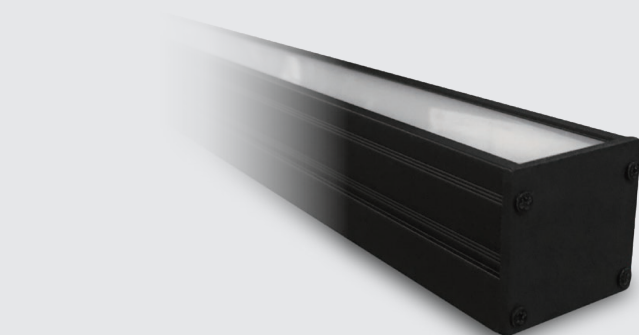

RN405 / RN410 / RN415 / RN420
REXNephia



REX[®]LiTE
瑞司照明系統

Origin : Taiwan

Color : Black

Beam Angle : Linear Light, Flood, Embedded / Suspension

Dimension : L 509 x W32 x H30 mm

L1,009 x W32 x H30 mm

L1,509 x W32 x H30 mm

L2,009 x W32 x H30 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 800 / 1,600 / 2,400 / 3,200 Lm

Power Consumption : 7 / 14 / 21 / 28 W

Note : Open L x W31 x H>38 mm

QubicLine Series

21

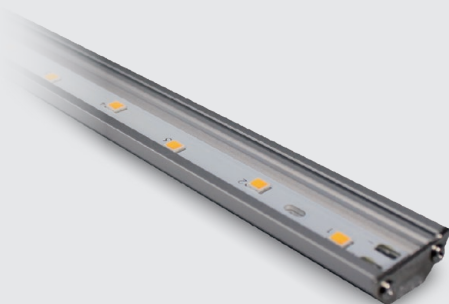

QL1 / QL2 / QL3 / QL4
QubicLine



REXLIITE[®]
瑞司照明系統

Origin : Taiwan

Color : Frosted Aluminum

Beam Angle : Linear Light, 120°

Dimension : L 295 × W20 × H8 mm

L 585 × W20 × H8 mm

L 875 × W20 × H8 mm

L 1,185 × W20 × H8 mm

LED Source : NICHIA LED

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 350 / 700 / 1,050 / 1,400

Power Consumption : 3.5 / 8.5 / 12.5 / 17W

Note :

REXHiking Series

22



RH1 / RH2 / RH3 / RH4
IP68
REXHiking

REX^{Li}TE[®]
瑞司照明系統



Origin : Taiwan

Color : Aluminum

Beam Angle : Wall Wash , Outdoor Spotlight, 25° / 40° / 80°

Dimension : L 295 x W60 x H85 mm

L 590 x W60 x H85 mm

L 890 x W60 x H85 mm

L 1,190 x W60 x H85 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3


Luminous Flux : 585 / 1,170 / 1,755 / 2,340 Lm

Power Consumption : 8.5 / 17 / 2 / 34 W

Note :



MG2
IP65
REXMini

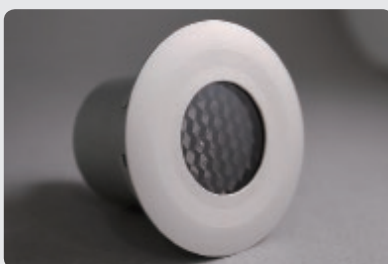

REX[®]LiTE
瑞司照明系統

Origin : Taiwan

Color : Black / White / Aluminum

Beam Angle : Spotlight, 25°

Dimension : Ø49 x H65 mm

LED Source : NICHIA LED

Color Tolerance Adjustment : SDCM ≤ 3

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Luminous Flux : 100 Lm

Power Consumption : 1.5W

Note : Open Ø45 x H 75 mm

IP65

QubicGuard Series

24



QG2
IP68
QubicGuard



REX[®]LITE
瑞司照明系統

Origin : Taiwan

Color : Stainless Steel

Beam Angle : Flood Ground Light

Dimension : Ø100 x H70 mm

LED Source : NICHIA LED

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Luminous Flux : 100 Lm


Power Consumption : 1.5 W

Note : Open Ø90 x H65 mm

IP68



QS2
QubicSquire

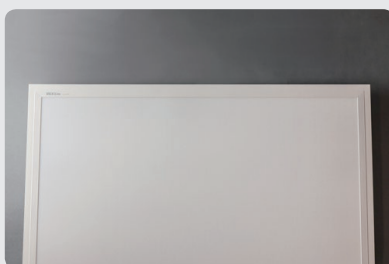

REX LITE[®]
瑞司照明系統

Origin : Taiwan

Color : White

Beam Angle : Flood

Dimension : L600 x W600 x H30 mm

LED Source : NICHIA LED, Mono

LED Specs : Ra $\geq$ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM $\leq$ 3

Luminous Flux : 3,000 Lm

Power Consumption : 35 W

Note : Open L 585mm x W585 mm



QS4
QubicSquire



REX LITE[®]
瑞司照明系統

Origin : Taiwan

Color : White

Beam Angle : Flood

Dimension : L1200 × W300 × H30 mm

LED Source : NICHIA LED, Mono

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K R9>50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 3,000 Lm

Power Consumption : 35 W

Note : Open L285 × W1185 mm



RS
IP68
REXStream

REX^{Li}TE[®]
瑞司照明系統



Origin : Taiwan

Color : Transparent

Beam Angle : 120°, Soft Strip Light

Dimension : L x W 12 x H 6 mm

LED Source : NICHIA LED, Mono color

LED Specs : Ra ≥ 90 LM80 2,700K ~ 5,000K / Color R9 > 50

Color Tolerance Adjustment : SDCM ≤ 3

Luminous Flux : 450 Lm

Power Consumption : 5W / M

Note : Mono color

Soft Strip Light

Silicone Tube

REXLiTE®
瑞司照明系統

FISHBONE Design

觀境設計股份有限公司



412027 台中市大里區
西湖路187巷108號 | 總公司
No.108, Ln.187, Xihu Rd., Dali Dist.,
Taichung City 412027, Taiwan | Headquarter

408008 台中市南屯區
文心南路39號 | 品牌意識空間
No. 39, Wenxin S. Rd., Nantun Dist.,
Taichung City 408008, Taiwan

106022 台北市大安區
建國南路二段69巷56號 | 設計師聚會所
No.56, Ln. 69, Sec. 2, Jianguo S. Rd., Da'an Dist.,
Taipei City 106022, Taiwan

T +886-4-2496-4053

F +886-4-2496-0497

W www.rexlite.com.tw

f REXLiTE

@ rexlite.tw

客服專線 TEL 0800-279-979